



Quality is Behind the Diamond



HAND-PORTABLE FIRE EXTINGUISHERS

Product Catalog

1-866-548-8147 | sales@foxcanada.net | www.foxcanada.net

PORTABLE FIRE EXTINGUISHERS FROM AMEREX

Amerex portable fire extinguishers have been the industry standard for 50 years. Since 1971, our commitment to quality, service, and innovation is unmatched. ***Quality is Behind the Diamond***-in every product.

People never think twice about fire extinguishers until they need one, but when they need one the extinguisher must work. At Amerex, we all work together to make sure we're delivering the best quality products available. From our quality audits at each level of production to shipping preparations before leaving

the warehouse, you know the products you receive are what you have come to expect from Amerex. With warehouses located in Oakland, NJ, Elk Grove Village, IL, Santa Fe Springs, CA, and Trussville, AL, you are assured that product lead times are at a minimum.



Longer life, lower cost and the best warranty in the industry—***that's quality behind the diamond.***

All Amerex Fire Extinguishers comply with the recommendations of the **National Fire Protection Association** and are tested and rated by **Underwriters Laboratories** or **FM Global** to **ANSI / UL Standards**. All extinguisher nameplates contain the necessary HMIS information to comply with national and local OSHA requirements.













WHERE TO USE

Amerex manufactures an extensive variety of hand-portable and wheeled fire extinguishers, both “compliance” (code required) and “specialty” types.

“Compliance” extinguishers are designed to meet and exceed state or local fire protection requirements. “Specialty” extinguishers are intended for use on particular types of hazards. Careful attention should be paid to locating them in close proximity to the specific hazard they are meant to protect. It is natural for a person to use the extinguisher located nearest to a fire. The most current issue

of NFPA-10 should be consulted for minimum recommended fire extinguisher types, placement, and travel distances. Your local Amerex Fire Equipment Distributor is professionally equipped to help you evaluate and implement these recommendations. All “Pictograms” are detailed below and should be reviewed with all who might be expected to use a fire extinguisher. Everyone should

be familiar with these picture symbols which identify the types of fires on which they may be used. The international sign system diagonal red slash indicates a potential danger if the extinguisher is used on that particular type of fire.

Types of Fires				Types of Extinguishers	
Class A	Ordinary combustibles	Wood, paper, rubber, fabrics, and many plastics		Class A	
Class B	Flammable liquids & gases	Gasoline, oils, paint, lacquer, and tar		Class A:B	
Class C	Live electrical equipment	Fires involving live electrical equipment		Class A:B:C	
Class D	Combustible metals or combustible metal alloys	NO picture symbol		Class A:C	
Class K	Fires in cooking appliance that involve combustible cooking media	Vegetable or Animal Oils, and Fats		Class B:C	
				Class D	
				Class A:K	

HOW TO USE

All Amerex extinguishers are furnished with a detailed “Owners Manual” containing valuable information. The manual contains information on the installation, use, and maintenance of the extinguisher. The extinguisher nameplate contains specific information on “HOW TO USE” the particular extinguisher. The label instructions vary slightly according to type and size. All potential operators should be totally familiar with the instructions on any extinguisher they might be required to use.



APPLICATIONS



Healthcare

Aluminum Valve Dry Chemical, CO2, Clean Agent, K Class, Water Mist, Wheeled



Transportation

ABC Dry Chemical—All varieties (OEM, Up-fitters, Aftermarket)



Industrial

Light: Aluminum Valve Dry Chemical, Clean Agent, CO2, Class D

Medium: Aluminum Valve Dry Chemical, Clean Agent, CO2, Class D

Heavy: Brass Valve Dry Chemical, Z-Series, Class D, Wheeled



Education

Aluminum Valve Dry Chemical, Clean Agent, K class, Water Mist, CO2, Restaurant Systems



Oil and Gas

Brass Valve Dry Chemical, Z-Series, Wheeled



Chemical

Brass Valve Dry Chemical, Z-Series, Wheeled



Quality is Behind the Diamond



Distribution Centers

Brass Valve Dry Chemical, Z-Series, Wheeled

WATER

Model 240 utilizes the cooling, soaking, and penetrating effect of a 45-55 foot stream of WATER. The 55-second discharge time makes it very effective for inexperienced operators for use on Class A fires.

RUGGED

- 5-Year Manufacturer's Warranty
- Stored Pressure Design
- Polished Stainless-Steel Cylinders
- All Stainless Steel Valve Construction
- Exclusive Crevice-Free, Butt Welded Cylinder
- Temperature Range +40°F to 120°F

USER FRIENDLY

- Maximum Visibility During Discharge
- Large Loop Stainless Steel Pull Pin
- QR Coded and Bilingual Labels

OPTION

- Model 506B Anti-Freeze Charge



**Model
240**



The Model 240 may be freeze protected to -40°F by adding a Model 506B Charge

AGENT TYPE	WATER
Design	Hose & Nozzle
Model Number	240
UL & ULC Rating	2A
Capacity	2.5 GAL
Shipping WT. (Lbs)	7.5
Height (In.)	24.5
Width (In.)	9
Depth (In.)	7
Range (Initial-Ft)	45-55
Discharge Time (Sec.)	55
Included Bracket	Wall

MANUFACTURED AND TESTED TO UL STANDARDS

Complies with NFPA 10 Standard
ISO-9001/ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S507 - ANSI/UL626 &
CAN/ULC-S508 - ANSI/UL711

WET CHEMICAL

WET CHEMICAL extinguishers are the best restaurant kitchen appliance hand-portable fire extinguishers you can purchase. Each model utilizes a specially blended potassium acetate base agent and has been tested and approved by UL for restaurant kitchen hazards. The recent trend to more efficient cooking appliances and use of vegetable-based cooking oils dictates the use of a hand-portable fire extinguisher with greater fire-fighting capacity and cooling effect to combat these very hot and difficult fires. Available in two sizes; 6 liter or 2½ gallon—with attractive stainless-steel cylinders and easy-to-use hose-and-spray application nozzle. The superior fire-fighting capability of the Wet Chemical agent is placed exactly where you aim it with no dry chemical residue to clean up. The Models B260 and B262 are the ideal "KITCHEN USE" fire extinguishers. They supplement existing cooking equipment automatic system protection for an extra margin of safety.

RUGGED

- 5-Year Manufacturer's Warranty
- Stored Pressure Design
- Polished Stainless-Steel Cylinders –USCG Models have Durable High- Gloss Polyester Powder Paint Coating
- All Stainless-Steel Valve Construction
- Exclusive Crevice-Free, Butt-Welded Cylinder
- Tested on Commercial Deep Fat Fryers to ANSI/UL711 Test Protocol and Safe to Use on Energized Electrical Appliances
- Class 2A Rated to Meet Fire Code Occupancy Hazard Requirements
- Temperature Range +40°F to 120°F

USER FRIENDLY

- Factory Charged
- Large Loop Stainless-Steel Pull Pin
- Swivel Connection on Hose Allows Nozzle to be Oriented for Proper Use
- Nozzle Grip Design with 45° Angle for Easy "Overhead" Application
- Agent Discharged as a Fine Mist—Helps Prevent Grease Splash and Re-flash While Cooling the Appliance
- Precise Extinguishing Agent Application
- QR Coded and Bilingual Labels

OPTION

- Models B260G and B262G are USCG Approved



B260

B262



Coast Guard Approved

B260CG B262CG

Must use 810CG Bracket
(Sold Separately)



MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
COMPLIES WITH NFPA 10 STANDARD
ISO-9001 and ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S554 - ANSI/UL8 &
CAN/ULC-S508 - ANSI/UL711

Excellent for use on all cooking appliances including solid fuel char broilers

AGENT TYPE	WET CHEMICAL			
MODEL NUMBER	B260	B262	B260CG	B262CG
UL & ULC RATING	2A:K		2A:K	
CAPACITY	6 Liter	2.5 Gal	6 Liter	2.5 Gal
SHIPPING WT. (LBS)	22.5	33.5	22.5	33.5
HEIGHT (IN.)	19	24.5	19	24.5
WIDTH (IN.)	9	9	9	9
DEPTH (IN.)	7	7	7	7
RANGE (INITIAL-FT)	10-12	10-12	10-12	10-12
DISCHARGE TIME (SEC.)	53	107	53	107
INCLUDED BRACKET	Wall	Wall	Wall	Wall



1-866-548-8147 | sales@foxcanada.net | www.foxcanada.net

WATER MIST

WATER MIST is the ultimate extinguisher for Class A fires and for locations where a potential Class C (electrical) hazard exists. The fine spray from the unique misting nozzle provides safety from electrical shock, greatly enhances the cooling and soaking characteristics of the agent, and reduces scattering of burning materials. The Amerex Water Mist extinguishers contain de-ionized water (sold separately) making them the best extinguishers for protection of hospital environments, telecommunication facilities, and “clean room” manufacturing facilities. The Amerex Water Mist extinguishers are easy to use, maintain, and service.

RUGGED

- 5-Year Manufacturer's Warranty
- Stored Pressure Design
- Stainless-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction
- Exclusive Crevice-Free, Butt-Welded Cylinder
- Temperature Range +40°F to 120°F

MR CONDITIONAL

- Non-magnetic Construction Tested by an Independent Agency for use in MRI Facilities to 11.7 Tesla (including wall hanger bracket)

CLEAN

- Non-toxic—Causes no Respiratory Problems
- 2-pack Charges 670 and 671 Deionized Water Extinguishing Agent Sold Separately
- Sanitary and Easy-to-Clean White Paint Finish
- No Powder Residue


USER FRIENDLY

- Wand Provides Greatest Operator Safety
- Large Loop Stainless-Steel Pull Pin
- Maximum Visibility During Discharge
- No Electrical Conductivity Back to the Operator
- No Thermal or Static Shock
- Minimal Training—Simplest to use
- Most Economical Agent Available
- QR Coded and Bilingual Labels



Recommended for Lithium-Ion Battery Fires

Tested to 11.7 Tesla



AGENT TYPE	DE-IONIZED WATER	
MODEL NUMBER	B270	B272
UL & ULC RATING	2A:C	2A:C
CAPACITY	1.75 Gal	2.5 Gal
SHIPPING WT. (LBS. EMPTY)	7	8
HEIGHT (IN.)	19	24.5
HEIGHT WITH HOSE AND WAND INSTALLED (IN.)	24.5	27.5
WIDTH (IN.)	11	11
DEPTH (IN.)	7	7
RANGE (INITIAL-FT.)	10-12	10-12
DISCHARGE TIME (SEC.)	72	80
INCLUDED BRACKET	NM Wall	NM Wall
REQUIRED CHARGE MODEL	670	671

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
Complies with NFPA 10 Standard
ISO-9001 and ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S554 - ANSI/UL8 &
CAN/ULC-S508 - ANSI/UL711



HALOTRON BRX™ (2-BTP)

Halotron BrX™ (2-BTP) Amerex provides a unique solution for Halon 1211 replacement. These extinguishers utilize Halotron BrX™ to fulfill the next generation of aviation extinguisher requirements. BrX is a low GWP and very low ODP clean agent approved for use on commercial aircraft. The extinguishers are constructed of a lightweight aluminum valve assembly and cylinders (Model 351 has a steel cylinder). Models 349 and 351 include a hose that allows the operator greater flexibility for utilization in tight spaces. Amerex is the solution for all of your portable extinguisher needs.

RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Aluminum Cylinders (Model 351 has a Steel Cylinder)
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction
- Hose is Unique to Amerex Product (Model 349 and 351)
- Extinguishers are Maintained in Accordance With NFPA 10
- Hose Provides Greater Access to Tight Spaces—Offering Greater Flexibility When Using the Extinguisher (Model 349 and 351)
- Temperature range: -40°F to 120°F/-40°C to 49°C
- Amerex Manufactures our Product In-House and Has Full Control Over our Supply Chain, Manufacturing, and Engineering.

CLEAN

- Leaves No Residue

FAA APPROVED

- All models have been tested for aircraft use by NTS to the shock and vibrate sections of RTCA DO-160G
- Models 347, 349 and 351 are FAA approved in accordance with DOT/FAA/AR-01/37

USER FRIENDLY

- Maximum Visibility During Discharge
- Large Loop Pull Pin (Model 351)
- No Electrical Conductivity Back to the Operator
- No Thermal or Static Shock
- QR Coded—Bilingual Labels

ENVIRONMENT

- EPA approved "Clean Agent" for Class A, B and C hazards
- Low GWP – 0.26 (100 year)
- Low ODP – 0.0028
- Short Atmospheric Lifetime



Model 351 ships with a wall bracket. Bracket (809) shown is sold separately.



BrX extinguishers have a 12 year service life and are non-rechargeable

Low GWP and very low ODP clean agent

AGENT TYPE	HALOTRON BrX™ (2-BTP)			
VALVE TYPE	ANODIZED ALUMINUM			
DESIGN	NOZZLE		HOSE & NOZZLE	
MODEL NUMBER	337TS	347TS	349TS	351
UL & ULC RATING	2B:C	5B:C	5B:C	2A:10B:C
CAPACITY (LBS.) / (kg)	1.92 / .87	3.75 / 1.7	3.75 / 1.7	12.5 / 5.67
FILLED WT. (LBS.) / (kg)	3.18 / 1.44	5.50 / 2.49	5.75 / 2.61	19.88 / 9.02
HEIGHT (IN.) / (mm)	11.25 / 285.75	17.59 / 446.9	17.59 / 446.9	20.25 / 514.3
WIDTH (IN.) / (mm)	4 / 101.6	4 / 101.6	5.88 / 149.35	8.5 / 215.9
DEPTH (in) / (mm)	3.25 / 82.6	3.25 / 82.6	3.25 / 82.6	5 / 127
DISCHARGE TIME (SEC.)	9	9	9	16
RANGE (INITIAL- FT. / M)	7-8 / 2.13-2.44	10-12 / 3.05-3.66	10-12 / 3.05-3.66	15-17 / 4.57-5.18
MINIMUM CONFINED SPACE REQUIREMENTS (FT³ / M³)	459 / 13	896 / 25.37	896 / 25.37	2,988 / 84.6
INCLUDED BRACKET	AIRCRAFT			WALL

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS

Complies with NFPA 10 Standard
ISO-9001 and ISO-14001 Certified
UL LISTED

CONFORMS TO TEST STANDARDS:

UL-2129 - ANSI/UL711
CAN/ULC-S508 and CAN/ULC-S566



1-866-548-8147 | sales@foxcanada.net | www.foxcanada.net

HALOTRON™ I

Halotron™ I clean fire extinguishing agent discharges as a rapidly evaporating liquid, which is non-conductive, non-corrosive, and leaves behind no residue. Halotron™ I is the clean agent market leader with a history of successful real-world protection of valuable assets. From model-scale aircraft to wide-body commercial aircraft, from data centers to pharmaceutical and other industrial plants, the Halotron™ I agent has been used to extinguish the fire, limit damage, and help reduce downtime that can be caused by other agents.

Applications for these extinguishers include: data centers, laboratories, manufacturing plants, general office areas, computer rooms, telecommunication facilities, clean rooms, control rooms, warehouses, military electronics, vehicles including classic autos, boats, engine compartments, aircraft ramps, on-board aircraft, and in facilities that service aircraft and any facility where dry chemical extinguishers could cause unacceptable damage or contamination.

RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction
- Temperature Range -40°F to 120°F

USER FRIENDLY

- Maximum Visibility During Discharge
- Large Loop Pull Pin
- No Electrical Conductivity Back to the Operator
- No Thermal or Static Shock
- QR Coded and Bilingual Labels

ENVIRONMENT

- EPA approved "Clean Agent" for Class A, B and C hazards
- Low GWP (Global Warming Potential) 0.0098, CFC-11=1.0
- Low ODP (Ozone Depletion Potential) -77,100 yr. CO2 time horizon
- Short Atmospheric Lifetime



Aluminum Valve
A384T
B385TS
B386T

OPTION

- 5 lb. (B386T), 11 lb., and 15½ lb.
- Extinguishers are USCG Approved With Bracket Listed on UL Label
- Chrome Cylinders (See Chart Below)

CLEAN

- Leaves No Residue



Model 397
Model 398



B394TS
FAA Model



FAA Approved Models Available (See Chart Below)

AGENT TYPE	HALOTRON™ I					
VALVE TYPE	Anodized Aluminum				Chromed Brass	
DESIGN	Nozzle				Hose & Nozzle	
MODEL NUMBER	A384T	B385TS	B386T	B394TS	397	398
UL & ULC RATING	1B:C	2B:C	5B:C	5B:C	1A:10B:C	2A:10B:C
CAPACITY (LBS.)	1.4	2.5	5	5.5	11	15.5
SHIPPING WT. (LBS.)	3.25	5.25	9.5	10	22.5	27.5
HEIGHT (IN.)	10	15.5	15.25	15	21.88	21.88
WIDTH (IN.)	3.5	6.38	5.75	5.13	9.25	9.25
DEPTH (IN.)	2.63	3	4.25	4.25	6	6
RANGE (INITIAL - FT.)	6-8	6-10	9-15	9-15	9-15	12-18
DISCHARGE TIME (SEC.)	9	9	9	9	9	14
OPTIONAL CHROME CYLINDER	Yes	Yes	Yes			
MINIMUM CONFINED SPACE REQUIREMENTS (CU. FT.)	196	350	700	770	1540	2170
FAA APPROVED MODEL				Yes	Yes	Yes
INCLUDED BRACKET	Vehicle	Vehicle	Vehicle	Aircraft	Wall	Wall

AVAILABLE IN 65/150 LB. WHEELED EXTINGUISHERS

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
COMPLIES WITH NFPA 10 STANDARD
ISO-9001/ISO-14001 CERTIFIED
UL LISTED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S566 - ANSI/UL2129 &
CAN/ULC-S508 - ANSI/UL711

HALON 1211

HALON 1211 is a liquefied gas, pressurized with nitrogen, which discharges as a vapor causing no cold or static shock and no impairment of the operator's vision. This "CLEAN" agent quickly penetrates difficult-to-see and hard-to-reach areas and leaves no residue. It is recommended for protection of delicate, sensitive, and expensive computers, electrical equipment, tapes and film, automotive and aircraft engines, laboratory chemicals and equipment.

RUGGED

- 1-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction
- Temperature Range -65°F to 120°F

CLEAN

- Leaves No Residue
- Reclaimed Halon 1211 is Restored to Original Military Specification
- Uses All Recycled Gas in Accordance With The Montreal Protocol



C354TS

USER FRIENDLY

- Maximum Visibility During Discharge
- Large Loop Pull Pin
- No Electrical Conductivity Back to the Operator
- No Thermal or Static Shock
- QR Coded and Bilingual Labels

OPTION

- USCG Approved with Bracket Listed on UL Label (except model A344T)
- Chrome Cylinders (See Chart Below)

Aluminum Valve
A344T
C352TS
B355T



Brass Valve
B369
B371
361



Recycled gaseous agent certified to meet military specifications.

AGENT TYPE	HALON 1211						
VALVE TYPE	ANODIZED ALUMINUM				CHROME PLATED BRASS		
DESIGN	NOZZLE		HOSE	NOZZLE	HOSE		
MODEL NUMBER	*A344T	*C352TS	*C354TS	B355T	B369	B371	361
UL RATING	2B:C	5B:C	5B:C	10B:C	10B:C	2A:40B:C	4A:80B:C
CAPACITY (LBS.)	1.25	2.5	3	5	9	13	17
SHIPPING WT. (LBS.)	2.75	5.5	6	9.75	16.75	22	36.25
HEIGHT (IN.)	10	14.38	14.38	15.25	16.25	20.25	24
WIDTH (IN.)	3.63	4.5	6	5.75	8.5	8.5	9.75
DEPTH (IN.)	2.63	3	3	4.25	5	5	7
RANGE (INITIAL- FT.)	9-12	9-15	9-15	9-15	12-18	12-18	12-18
DISCHARGE TIME (SEC.)	10	10	12	10	9	14	22
OPTIONAL CHROME CYLINDER	YES	YES	YES	YES		YES	
MINIMUM SPACE REQUIREMENTS (CU. FT.)	156	312	375	624	1123	1622	2120
INCLUDED BRACKET	VEHICLE	AIRCRAFT	AIRCRAFT	VEHICLE	WALL	WALL	WALL
* SPECIAL VALVE DESIGN FOR AIRCRAFT INSTALLATIONS							

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
 Complies with NFPA 10 Standard
 ISO-9001 and ISO-14001 Certified
 UL LISTED

CONFORMS TO TEST STANDARDS:
 UL-1093 - ANSI/UL711



1-866-548-8147 | sales@foxcanada.net | www.foxcanada.net

CARBON DIOXIDE

CARBON DIOXIDE is discharged as a white cloud of “snow” which smothers a fire by eliminating oxygen. It is effective for Class B flammable liquids and is electrically non-conductive. Carbon Dioxide is a clean, non-contaminating, odorless gas.

RUGGED

- 5-Year Manufacturer's Warranty
- All-Metal Valve Construction
- Rust-Free Aluminum Cylinders
- Durable High-Gloss Polyester Powder Paint
- Temperature Range -22°F to 120°F

USER FRIENDLY


- Meets Many Hospital Medical Equipment Requirements
- Large Loop Stainless Steel Pull Pin
- Model 322NM is Independently Tested and Approved for use in MRI Facilities to 11.7 Tesla
- Model 322NM has a Sanitary White Paint Finish (easy to clean)
- QR Coded and Bilingual Labels

CLEAN

- Leaves No Residue

OPTION

- USCG Approved with Bracket Listed on UL Label



**Model
322NM
NON-MAGNETIC**



**Models
332 331
322 330**



Non-Magnetic model available (Model 322NM - Tested to 11.7 Tesla).

AGENT TYPE	CARBON DIOXIDE				
VALVE TYPE					
DESIGN	TUBE & HORN		HOSE & HORN		
MODEL NUMBER	322	322NM	330	331	332
UL & ULC RATING	5B:C	5B:C	10B:C	10B:C	10B:C
CAPACITY (LBS.)	5	5	10	15	20
SHIPPING WT. (LBS.)	13.1	13.1	28.25	37.75	50.75
HEIGHT (IN.)	17.75	17.75	24	30	30
WIDTH (IN.)	8.25	8.25	12	12	13
DEPTH (IN.)	5.25	5.25	7	7	8
RANGE (INITIAL- FT.)	3-8	3-8	3-8	3-8	3-8
DISCHARGE TIME (SEC.)	9	9	11	14.5	19.2
INCLUDED BRACKET	WALL	NM WALL	WALL	WALL	WALL

**AVAILABLE IN 50/100 LB.
WHEELED EXTINGUISHERS**

**MANUFACTURED AND TESTED
TO ANSI/UL STANDARDS**
COMPLIES WITH NFPA 10 STANDARD
ISO-9001/ISO-14001 CERTIFIED
UL LISTED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S503 - ANSI/UL154 &
CAN/ULC-S508 - ANSI/UL711

CLASS D

The Amerex "soft flow" extension applicator is particularly suited for fighting Class D fires. It allows the operator to stand away from the extreme heat and toxic fumes caused by burning material. The easily controlled, even discharge provides a non-dispersing application of the agent. The extension applicator may be quickly detached to provide a straight stream of chemical where greater range is required.

RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Special Corrosion-Resistant Yellow Paint
- Class D Color-Coded Paint Finish
- All-Metal Valve Construction
- Temperature Range -40°F to 120°F

USER FRIENDLY

- Unique "Soft Flow" Extension Applicator Plus Built-In Long-Range Nozzle
- Large Loop Stainless-Steel Pull Pin
- QR Coded and Bilingual Labels



MODELS
B570
B571



OPTION

- MODEL 859 Dolly Cart provides for easy transport

MODEL B570 contains a special blended Sodium Chloride-based dry powder extinguishing agent. Heat from the fire causes it to cake and form a crust excluding air and dissipating heat from burning metal. Metal fires involving magnesium, sodium, potassium, and sodium-potassium alloys can be successfully extinguished with this extinguisher. There is data showing that zirconium, uranium, titanium, and powdered aluminum fires can be controlled and extinguished with this unique extinguisher.

Extinguishing Capacity

Magnesium Chips: 4 ft.² and/or 6 lbs. of metal
Sodium or Potassium Spill: 5 ft.² and/or 5 lbs. of metal
Sodium or Potassium Spill Depth Over": 3 ft.² and or 6 lbs. of metal
Sodium Potassium Alloy Spill: 3 ft.² and/or 2 lbs. of metal

Available in 150-lb. Wheeled Extinguisher

MODEL B571 contains a copper extinguishing agent specially developed by the U.S. Navy for fighting lithium and lithium alloy fires. The copper compound smothers the fire and provides an excellent heat sink for dissipating heat. Copper powder has been found to be superior to all other known fire extinguishing agents for lithium metal fires. Not recommended for lithium-ion battery fires.

Extinguishing Capacity

4 ft.² and/or 5 lbs. of lithium

Available in 250-lb. Wheeled Extinguisher

For Combustible Metal Fires

AGENT TYPE	SODIUM CHLORIDE	COPPER
VALVE TYPE	CHROME PLATED BRASS	
DESIGN	HOSE & HORN OR WAND APPLICATOR	
MODEL NUMBER	B570	B571
CAPACITY (LBS.)	30	30
SHIPPING WT. (LBS.)	53	53
HEIGHT (IN.)	35	35
WIDTH (IN.)	13	13
DEPTH (IN.)	8	8
RANGE (INITIAL- FT.)	3-6	3-6
DISCHARGE TIME (SEC.)	24	18
FM APPROVED	YES	YES
INCLUDED BRACKET	WALL	WALL

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
COMPLIES WITH NFPA 10 STANDARD
ISO-9001/ ISO-14001 CERTIFIED
FM APPROVED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S504 - ANSI/UL299 &
CAN/ULC-S508 - ANSI/UL711



1-866-548-8147 | sales@foxcanada.net | www.foxcanada.net

ABC DRY CHEMICAL

ABC or Multi-Purpose extinguishers utilize a specially fluidized and siliconized mono ammonium phosphate dry chemical. It chemically insulates Class A fires by melting at approximately 350°F and coats surface to which it is applied. It smothers and breaks the chain reaction of Class B fires and will not conduct electricity back to the operator.

RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction
 - Brass Valve-Heavy Duty**
 - Chrome-Plated Brass Valve Body
 - Stainless-Steel Handle & Lever
 - Aluminum Valve-Light to Medium Duty**
 - Anodized Aluminum Valve Body
 - Anodized Aluminum Handle & Lever
- Temperature Range -65°F to 120°F

USER FRIENDLY

- Easy and Economical to Maintain and Service
- Large Loop Pull Pin
- QR Coded and Bilingual Labels



Aluminum Valve
B417T
B500/T
B402/T
B443
B456
A411

OPTION

- USCG Approved with Bracket Listed on UL Label
- Chrome Cylinders (See Chart Below)

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
 COMPLIES WITH NFPA 10 STANDARD
 ISO-9001/ISO-14001 CERTIFIED
 UL LISTED

CONFORMS TO TEST STANDARDS:
 CAN/ULC-S504 - ANSI/UL299 &
 CAN/ULC-S508 - ANSI/UL711



Brass Valve
B424
B461
B441
423



AVAILABLE IN WHEELED EXTINGUISHERS

Largest selection of size and extinguisher options available.

AGENT TYPE	ABC DRY CHEMICAL									
VALVE TYPE	ANODIZED ALUMINUM						CHROME PLATED BRASS			
DESIGN	NOZZLE	HOSE & NOZZLE					HOSE & NOZZLE			
MODEL NUMBER	B417T	B500/B500T	B402/B402T	B443	B456	A411	B424	B461	B441	423
UL & ULC RATING	1A:10B:C	2A:10B:C	3A:40B:C	3A:40B:C	4A:80B:C	10A:120B:C	2A:10B:C	3A:40B:C	4A:80B:C	10A:120B:C
CAPACITY (LBS.)	2.5	5	5	6	10	20	5	6	10	20
SHIPPING WT. (LBS.)	5.25/5.5	9.25/9.5	9.25/9.5	12.75	18	36.5	10.5	14	19.5	38
HEIGHT (IN.)	15.5	15.25	15.25	16	20	24	15.5	16.25	20.5	24
WIDTH (IN.)	5.75	7.25	7.25	7.75	7.75	10.25	8	8.5	8.75	10.25
DEPTH (IN.)	3	4.25	4.25	5	5	7	4.25	5	5	7
RANGE (INITIAL- FT.)	9-15	12-18	12-18	15-21	15-21	15-21	12-18	15-21	15-21	15-21
DISCHARGE TIME (SEC.)	9	14	14	14.5	22	30	14	14	22	30
OPTIONAL CHROME CYLINDER	YES	YES	YES		YES			YES	YES	
INCLUDED BRACKET	WALL/VEHICLE			WALL			WALL			

REGULAR DRY CHEMICAL

REGULAR extinguishers contain a siliconized sodium bicarbonate based dry chemical with free flowing and non-caking additives. Economical Class B & C protection with lower initial cost and recharging. This chemical smothers fires in flammable liquids and pressurized gases and will not conduct electricity back to the operator.

RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All Metal Valve Construction
 - Brass Valve-Heavy Duty**
 - Chrome-Plated Brass Valve Body
 - Stainless-Steel Handle & Lever
 - Aluminum Valve-Light to Medium Duty**
 - Anodized Aluminum Valve Body
 - Anodized Aluminum Handle & Lever
- Temperature Range -65°F to 120°F

USER FRIENDLY

- Easy and Economical to Maintain and Service
- Large Loop Pull Pin
- QR Coded and Bilingual Labels



Aluminum Valve
A620T
B403/T
B409T
B453/T
B457
A412

OPTION

- USCG Approved with Bracket Listed on UL Label
- Chrome Cylinders (See Chart Below)

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS

Complies with NFPA 10 Standard
 ISO-9001 and ISO-14001 Certified
 UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 &
 CAN/ULC-S508 - ANSI/UL711



Brass Valve
B462
B447
408



AVAILABLE IN WHEELED EXTINGUISHERS

Largest selection of size and extinguisher options available.

AGENT TYPE	REGULAR DRY CHEMICAL								
VALVE TYPE	ANODIZED ALUMINUM						CHROME PLATED BRASS		
DESIGN	NOZZLE			HOSE & NOZZLE					
MODEL NUMBER	A620T	B403/B403T	B409T	B453/B453T	B457	A412	B462	B447	408
UL & ULC RATING	2B:C	10B:C	10B:C	40B:C	60B:C	120B:C	40B:C	60B:C	120B:C
CAPACITY (LBS.)	1	2.5	5	5.5	10	20	6	10	20
SHIPPING WT. (LBS.)	2.5	5.5	9.25	9.75	18	36.5	14	19.5	38
HEIGHT (IN.)	10	15.5	15.25	15.25	20	24	16.25	20.25	24
WIDTH (IN.)	3.5	5.75	5.5	7.25	7.75	10.25	8.5	8.75	10.25
DEPTH (IN.)	2.63	3	4.25	4.25	5	7	5	5	7
RANGE (INITIAL- FT.)	5-8	9-15	12-18	12-18	15-21	15-21	15-21	15-21	15-21
DISCHARGE TIME (SEC.)	9.5	9	9	14	19	29	14	18	27
OPTIONAL CHROME CYLINDER	YES	YES	YES	YES					
INCLUDED BRACKET	VEHICLE	WALL/VEHICLE	VEHICLE	WALL/VEHICLE	WALL				



1-866-548-8147 | sales@foxcanada.net | www.foxcanada.net

PURPLE K DRY CHEMICAL

PURPLE K extinguishers contain specially fluidized and siliconized potassium bicarbonate dry chemical which is particularly effective on Class B flammable liquids and pressurized gases. It is electrically non-conductive. Purple K has been the choice of oil, gas, chemical and utilities industries as the preferred fire-fighting agent.

RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction
 - Brass Valve-Heavy Duty**
 - Chrome-Plated Brass Valve Body
 - Stainless-Steel Handle & Lever
 - Aluminum Valve-Light to Medium Duty**
 - Anodized Aluminum Valve Body
 - Anodized Aluminum Handle & Lever
- Temperature Range -65°F to 120°F

USER FRIENDLY

- Easy and Economical to Maintain and Service
- Large Loop Pull Pin
- QR Coded and Bilingual Labels



Aluminum Valve
B410T
B479/T
A413

OPTION

- USCG Approved with Bracket Listed on UL Label
- Chrome Cylinders (See Chart Below)

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
COMPLIES WITH NFPA 10 STANDARD
ISO-9001/ ISO-14001 CERTIFIED
UL LISTED

CONFORMS TO TEST STANDARDS:
CAN/ULC-S504 - ANSI/UL299 &
CAN/ULC-S508 - ANSI/UL711



Brass Valve
B460
415



AVAILABLE IN WHEELED
EXTINGUISHERS

Largest selection of size and extinguisher options available.

AGENT TYPE	PURPLE K DRY CHEMICAL				
VALVE TYPE	ANODIZED ALUMINUM			CHROME PLATED BRASS	
DESIGN	NOZZLE	HOSE & NOZZLE			
MODEL NUMBER	B410T	B479/B479T	A413	B460	415
UL & ULC RATING	10B:C	30B:C	120B:C	80B:C	120B:C
CAPACITY (LBS.)	2.5	5	20	10	20
SHIPPING WT. (LBS.)	5.5	9.5	36.4	19.5	38
HEIGHT (IN.)	15.5	15.25	24	20.5	24
WIDTH (IN.)	5.75	7.25	10.25	8.75	10.25
DEPTH (IN.)	3	4.25	7	5	7
RANGE (INITIAL- FT.)	9-15	12-18	15-21	15-21	15-21
DISCHARGE TIME (SEC.)	9.5	12	28	22	28
OPTIONAL CHROME CYLINDER	YES	YES		YES	
INCLUDED BRACKET	VEHICLE	WALL/VEHICLE		WALL	

Z-SERIES HIGH PERFORMANCE

Z-Series extinguishers are the ultimate choice in fire extinguishers for high hazard, frequent use, and extreme environment applications. Economical-less initial cost, lower maintenance costs, and greater reliability than cartridge-operated extinguishers. Amerex Z-Series extinguishers are available with a proprietary, zinc-enriched coating that resists corrosion for up to 12 years in severely salt-contaminated environments.

RUGGED

- 12-Year Manufacturer's Warranty
- Zinc-Enriched Coating
- All-Metal Valve Construction
- Gauge Guards are Chrome-Plated Brass
- Protective Rubber Foot Rings
- Superior Range (Vertical & Horizontal)
- High (240 PSI) Operating Pressure
- Temperature Range -65°F to 120°F

AGENTS

- ABC Multi Purpose, Purple K

OPTION

- USCG Approved with Bracket Listed on UL Label
- Hot dip galvanized USCG brackets available

MANUFACTURED AND TESTED TO ANSI/UL STANDARDS

Complies with NFPA 10 Standard ISO-9001 and ISO-14001 Certified UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 & CAN/ULC-S508 - ANSI/UL711

USER FRIENDLY

- Wide Grip Allows Clearance for Gloved Hand
- Large Loop Stainless-Steel Pull Pin
- QR Coded and Bilingual Labels

FAST FLOW

- High Flow Rate
- Fast Discharge
- Quicker Knockdown
- More Operator Protection

COMPLIANCE FLOW

- Long Range
- Highest UL Ratings



Fast Flow

790
791
792
723
724
793
794
795
796

Compliance Flow

713
714
715
716
717
718



AVAILABLE IN 125-AND 250-LB. WHEELED EXTINGUISHERS

Affordable and easy to maintain.

AGENT TYPE	ABC DRY CHEMICAL			PURPLE K DRY CHEMICAL				ABC DRY CHEMICAL			PURPLE K DRY CHEMICAL			
PERFORMANCE	FAST FLOW							COMPLIANCE FLOW						
VALVE TYPE	CHROME PLATED BRASS WITH GAUGE GUARD													
DESIGN	HOSE & NOZZLE													
MODEL NUMBER	790	791	792	793	794	795	796	713	714	715	716	717	718	
UL & ULC RATING	2A:40B:C	4A:40B:C	4A:40B:C	40B:C	40B:C	20B:C	40B:C	4A:80B:C	10A:120B:C	10A:160B:C	80B:C	120B:C	160B:C	
CAPACITY (LBS./KG)	13.2/6	20/9	30/13.6	13.2/6	20/9	20/9	30/13.6	13.2/6	20/9	30/13.6	13.2/6	20/9	30/13.6	
SHIPPING WT. (LBS.)	29	40	56	29	40	40	56	29	40	56	29	40	56	
HEIGHT (IN.)	17.5	24.75	26.5	17.5	24.75	24.75	26.5	17.5	24.75	26.5	17.5	24.75	26.5	
WIDTH (IN.)	10.5	10.5	11	10.5	10.5	10.5	11	10.5	10.5	11	10.5	10.5	11	
DEPTH (IN.)	7	7	8	7	7	7	8	7	7	8	7	7	8	
RANGE (INITIAL-FT.)	40-50			40-50				40-50			40-50			
DISCHARGE TIME (SEC.)	15	18	21	15	15	10	16	22	30	34	22	29	34	
AVERAGE DISCHARGE RATE (LBS./SEC.)	.94	1.20	1.60	.94	1.44	2.00	1.88	.59	.65	.95	.61	.67	.81	
INCLUDED BRACKET	WALL			WALL				WALL			WALL			



1-866-548-8147 | sales@foxcanada.net | www.foxcanada.net

HIGH FLOW DRY CHEMICAL

HIGH FLOW portable fire extinguishers for applications where discharge rates exceeding one pound per second are required as specified in NFPA 10. These extinguishers utilize the same hardware and are manufactured to the same UL specifications as Amerex compliance-rated products.

RUGGED

- 6-Year Manufacturer's Warranty
- Stored Pressure Design
- Dependable Drawn-Steel Cylinders
- Durable High-Gloss Polyester Powder Paint
- All-Metal Valve Construction
 - Brass Valve-Heavy Duty**
 - Chrome-Plated Brass Valve Body
 - Stainless-Steel Handle & Lever
- Twice the Flow Rate of Standard Models
- Meets DOT Requirements
- Temperature Range -65°F to 120°F

OPTION

- USCG Approved with Bracket Listed on UL Label
- ABC, Regular, or Purple K Chemical

USER FRIENDLY

- Easy and Economical to Maintain and Service
- Large Loop Pull Pin
- QR Coded and Bilingual Labels



MODELS (10 LB)

720
721
722

MODELS (20 LB)

760
761
762



MANUFACTURED AND TESTED TO ANSI/UL STANDARDS
COMPLIES WITH NFPA 10 STANDARD
ISO-9001/ISO-14001 CERTIFIED
UL LISTED

CONFORMS TO TEST STANDARDS:

CAN/ULC-S504 - ANSI/UL299 &
CAN/ULC-S508 - ANSI/UL711

HIGH FLOW—Exceeds 1 lb. per second discharge rate

AGENT TYPE	ABC	ABC	REGULAR	REGULAR	PURPLE K	PURPLE K
MODEL NUMBER	720	760	721	761	722	762
CAPACITY (LBS.)	10	20	10	20	10	20
APPLICATION	HOSE & NOZZLE		HOSE & NOZZLE		HOSE & NOZZLE	
UL RATING	1A:20B:C	4A:60B:C	20B:C	60B:C	20B:C	60B:C
SHIPPING WEIGHT (LBS.)	19.5	38	19.5	38	19.5	38
DISCHARGE TIME (SEC.)	10	19	11	20	12	20
DISCHARGE RATE (LBS./SEC.)	1.22	1.14	1.15	1.13	1.15	1.08
DISCHARGE RANGE (FT.)	15-25	15-25	15-25	15-25	15-25	15-25
HEIGHT (IN.)	20½	24	20½	24	20½	24
WIDTH (IN.)	8¾	10¼	8¾	10¼	8¾	10¼
DEPTH (IN.)	5	7	5	7	5	7
TEMPERATURE RANGE (°F)	-65°F to 120°F					
INCLUDED BRACKET	WALL		WALL		WALL	



BRACKETS


Wall-Hanger Brackets



6- & 10-lb. Wall Strap Type



Vehicle/Marine/Aviation Brackets

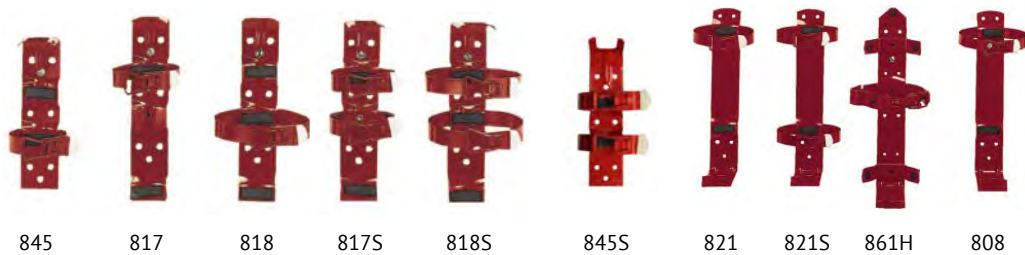

Heavy-Duty Box-Type Vehicle Brackets

(Red Brackets are Galvanized)




Heavy-Duty Dolly Cart



859

Heavy-Duty Rubber Strap Brackets

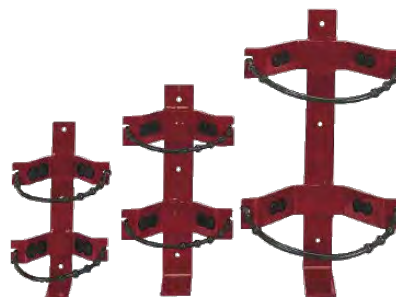

860 862 864

Horn Holder-CO₂ (810 or 811 Bracket)



AGENT TYPE	SIZE (CAPACITY)	MODEL	CYL. DIA. (INCH)	INCLUDED BRACKET	USCG BRACKET	OPTIONAL BRACKETS	RUBBER STRAP BRACKETS	859 DOLLY OPTION
WATER	2.5 GAL.	240	7	01007 WALL	N/A	810	864	YES
WATER MIST	1.75 GAL.	B270	7	14315 WALL	N/A	810NM	N/A	
	2.5 GAL.	B272	7	14315 WALL	N/A	810NM	N/A	
WET CHEMICAL	6 LITER	B260	7	01007 WALL		810	N/A	
	2.5 GAL.	B262	7	01007 WALL		810	864	YES
	6 LITER	B260CG	7	01007 WALL	810CG	N/A	N/A	
	2.5 GAL.	B262CG	7	01007 WALL	810CG	N/A	N/A	
HALOTRON® I™	1.4 LB.	A384T	2.63	845 VEHICLE	N/A	845S	N/A	
	2.5 LB.	B385TS	3	817S AIRCRAFT	N/A	817S	860	
	5 LB.	B386T	4.25	818 V/MARINE	818, 821, 861H	818S, 821, 821S, 807	860	
	5.5 LB.	B394TS	4.25	818S AIRCRAFT	N/A	818S, 821, 821S, 807	860	
	11 LB.	397	6	00575 WALL	812	812	N/A	
	15.5 LB.	398	6	00575 WALL	812	812	N/A	
HALON 1211	1.25 LB.	A344T	2.63	845 VEHICLE	N/A	845S	N/A	
	2.5 LB.	C352TS	3	817S AIRCRAFT	817	N/A	860	
	3 LB.	C354TS	3	817S AIRCRAFT	817	N/A	860	
	5 LB.	B355T	4.25	818 V/MARINE	818, 821, 861H	818S, 821, 821S, 807	860	
	9 LB.	B369	5	00546 WALL	808, 809	808, 809, 846, 889HB, 895	862	
	13 LB.	B371	5	01007 WALL	809	846, 809, 846, 889HB, 895	862	
	17 LB.	361	7	00577 WALL	810	810	864	YES
ABC DRY CHEMICAL	2.5 LB.	B417 / B417T	3	4834 WALL / 817 VM	817	817S	860	
	5 LB.	B402 / B402T	4.25	16591 WALL / 818 VM	818, 821, 861H	818S, 821, 821S, 807	860	
	5 LB.	B500 / B500T	4.25	16591 WALL / 818 VM	818, 821, 861H	818S, 821, 821S, 807	860	
	5 LB.	B424	4.25	16591 WALL	821, 861H	821, 821S, 807	860	
	6 LB.	B443	5	00546 WALL	808, 809, 895	808, 809, 889HB, 895	862	
	6 LB.	B461	5	00546 WALL	808, 809, 895	808, 809, 846, 889, 895	862	
	10 LB.	B456	5	00546 WALL	809, 895	808, 809, 846, 889, 889HB, 895	862	
	10 LB.	B441	5	01007 WALL	809, 895	808, 809, 889HB, 895, 846	862	
	20 LB.	A411	7	00577 WALL	810	810	864	YES
	20 LB.	423	7	00577 WALL	810	810	864	YES
REGULAR DRY CHEMICAL	1 LB.	A620T	2.63	845 VEHICLE	N/A	845S	N/A	
	2.5 LB.	B403 / B403T	3	4834 WALL / 817 VM	817	817S	860	
	5 LB.	B409T	4.25	818 V/MARINE	818, 821, 861H	807, 818S, 821, 821S, 861H	860	
	5.5 LB.	B453	4.25	16591 WALL	818, 821, 861H	807, 818S, 821, 821S, 861H	860	
	6 LB.	B462	5	00546 WALL	808, 809, 895	808, 809, 889HB, 895	862	
	10 LB.	B447	5	01007 WALL	809, 895	808, 809, 846, 889HB, 895	862	
	10 LB.	B457	5	00546 WALL	809, 895	808, 809, 846, 889HB, 895	862	
	20 LB.	A412	7	00577 WALL	810	810	864	YES
	20 LB.	408	7	00577 WALL	810	810	864	YES
PURPLE K DRY CHEMICAL	2.5 LB.	B410T	3	817 V/MARINE	817	817S	860	
	5 LB.	B479 / B479T	4.25	16591 WALL / 818 VM	818, 821, 861H	807, 818S, 821, 821S, 861H	860	
	10 LB.	B460	5	01007 WALL	809, 895	808, 809, 846, 889HB, 895	862	
	20 LB.	A413	7	00577 WALL	810	810	864	YES
	20 LB.	415	7	00577 WALL	810	810	864	YES
CARBON DIOXIDE	5 LB.	322	5.25	00546 WALL	809	809	862	
	5 LB.	322NM	5.25	17737 WALL	N/A	N/A	N/A	
	10 LB.	330	7	00575 WALL	810	810	N/A	
	15 LB.	331	7	00575 WALL	810	810	864	YES
	20 LB.	332	8	22290 WALL	811	811	864	YES
Z-Series High Performance	13.2 LB. (6 KG)	790, 793, 713, 716	7	09582 WALL	810 & 810G	810 & 810G	N/A	
	20 LB. (9 KG)	791, 794, 795, 714, 717	7	09582 WALL	810 & 810G	810 & 810G	864	YES
	30 LB. (13.6 KG)	792, 796, 715, 718	8	09581 WALL	811 & 811G	811 & 811G	864	YES
HIGH FLOW EXTINGUISHERS	10 LB.	720, 721, 722	5	01007 WALL	809, 895	808, 809, 889HB, 895, 846	862	
	20 LB.	760, 761, 762	7	00577 WALL	810	810	864	YES
CLASS D DRY POWDER	30 LB.	B570	8	00577 WALL	N/A	811	864	YES
	30 LB.	B571	8	00577 WALL	N/A	811	864	YES

All Amerex brackets meet the latest UL salt spray requirements (240 hrs. @ 20% salt solution - ASTM B117)
 1-year manufacturer's warranty applies to all brackets. Please see Amerex Parts Catalog for bracket details.





1-866-548-8147 | sales@foxcanada.net | www.foxcanada.net



Quality is Behind the Diamond



ISO 9001 – Quality
ISO 14001 – Environmental
OHSAS 18001 – Safety

CERTIFIED

Amerex Corporation makes every attempt possible to provide the most current and updated information. Information contained within this brochure is deemed to be as accurate as possible as of the printing date. Routine changes to products, codes and standards, and warranties subsequent to this printing will supersede printed information. Please contact Amerex Corporation for any revisions, updates, or product changes.